

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
22 November 2001 (22.11.2001)

PCT

(10) International Publication Number  
**WO 01/88185 A2**(51) International Patent Classification<sup>7</sup>: **C12Q 1/68**

(21) International Application Number: PCT/GB01/02122

(22) International Filing Date: 14 May 2001 (14.05.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0011443.9 13 May 2000 (13.05.2000) GB(71) Applicant (for all designated States except US): **DNA RESEARCH INNOVATIONS LIMITED** [GB/GB];  
940 Cornforth Drive, Sittingbourne Research Centre,  
Sittingbourne, Kent ME9 8PX (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BAKER, Matthew, John** [GB/GB]; 481 Loose Road, Maidstone, Kent ME15 9UJ (GB).(74) Agents: **KIDDLE, Simon, J.** et al.; Mewburn Ellis, York House, 23 Kingsway, London, Greater London WC2B 6HP (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SEPARATION DEVICE

(57) Abstract: A filter element for use in separation or purification of biomaterials such as nucleic acids from solid contaminants such as cell debris is described, having an end wall against which debris can collect and a side wall through which filtration can occur, in the presence of debris layered against the end wall. The filter elements are preferably formed from a porous, rigid plastic and are adapted to fit in a syringe, pipette or tube.

## Separation Device

### Field of the Invention

The present invention relates to separation devices and  
5 in particular to filter elements, devices and methods for  
separating solid contaminants from a liquid sample  
containing nucleic acid.

### Background of the Invention

10 When cells are lysed a crude mixture of soluble and  
insoluble materials is obtained which often needs to be  
purified for further analysis or purification. It is  
often necessary to separate nucleic acid present in the  
resulting mixture from solid contaminants and this  
15 presents a difficult problem in the art, especially where  
high throughput or automated sample processing are  
required. In general, the preferred prior art method for  
separating solid contaminants from nucleic acid  
containing liquid samples is to use centrifugation to  
20 spin down the solid contaminants, leaving a liquid sample  
containing the nucleic acid. However, while this is an  
effective technique, it is a slow, labour intensive batch  
process which is not readily amenable to automation and  
also requires expensive equipment. Attempts to solve  
25 this problem using conventional filters or membranes have  
been unsuccessful as they need to be supported  
(especially when wetted) and suffer from clogging, a lack  
of robustness which adversely affects performance and  
working life for this type of purification.

30

### Summary of the Invention

Broadly, the present invention relates to filter elements  
which can be incorporated in apparatus and used to  
separate nucleic acid in liquid samples from solid

contaminants. In particular, the present invention relates to filter elements formed from porous materials, especially plastic material with rigid, porous structures that can be formed in shapes other than the conventional disk shaped filters. In preferred embodiments, the filter elements of the present invention are formed with an end wall against which solid contaminants tend to collect, with filtration continuing to take place through one or more unblocked side walls, e.g. in a lateral direction as compared to the flow of the liquid sample against the end wall. In particular, the working life of the filter elements and their adaptability makes the present invention suitable for a range of different situations and can be used in automated systems.

Accordingly, in a first aspect, the present invention provides a filter element formed from a material having a rigid porous structure with a pore size between about 10 and about 200 microns, the filter element having an end wall and one or more side walls extending out of the plane of the end wall, so that when a liquid sample comprising nucleic acid and solid contaminants is introduced into the element, the liquid containing the nucleic acid filters through the side and/or end walls, while the solid contaminants are retained.

In one embodiment, the filter element is tubular and has a closed end so that when a sample comprising liquid and solid material contacts the filter element, e.g. when it is drawn into a pipette tip or syringe in which the filter is retained, the liquid filters through the side walls and out of the open end of the tube, while the solid material initially builds up and is retained on the end wall. Thus, in this embodiment, the tubular part of the element forms the side walls, while the outside of

closed end of the tube provides the end wall. In use, as solid material builds up in the closed end of the filter element, the liquid containing the nucleic acid can pass through the side walls, allowing filtration to continue and increasing the working life of the filter. In this embodiment, the tube preferably has a uniform circular cross-section. However, other cross-sections will be apparent to those skilled in the art and may be employed to adapt the filter element to fit in apparatus of differing geometries, at locations in the apparatus where a filtration function is required. It would also be possible to include a taper in the filter element, i.e. so that the cross-section varied along its length.

15 In an alternative embodiment, the filter element is in the form of a plug for spanning an aperture in a piece of apparatus, such as a tube or pipette tip, the plug having an end wall adapted to retain the filter element in the aperture and a side wall protruding from the end wall.

20 In one preferred embodiment, the plug is approximately T-shaped in cross section, and the side wall protruding from the end wall has a circular cross section. In use, the liquid sample is introduced around the protruding side wall and can filter through the end wall and the protruding side wall. As in the embodiment above, even if the end wall becomes blocked with solid debris, liquid can still pass for some time through the protruding portion as it is raised above the plane of the end wall.

25 30 In embodiments where the filter element is adapted to fit inside a pipette tip, a syringe or small tube (e.g. a PCR or centrifuge tube), conveniently, it has a diameter of between about 5 and 15mm and a length of between about 10 and 20 mm. In the first type of tube filter element, preferably the inner diameter of the tube is between

35

about 3 and 5 mm. In the second type of filter element having a protruding side wall, preferably this has a diameter of between about 3 and 6 mm.

- 5 In the present invention, the end wall and side walls are defined in relation to the flow of the liquid sample through the apparatus containing the filter element. In preferred embodiments, the side wall(s) of the filter element away from the plane of the end wall so that even  
10 if the end wall becomes blocked by layers of solid contaminants or debris building up on it, filtration through the parts of the side wall above the level of the blocking debris is possible.
- 15 The filter elements of the present invention therefore provide a solution to the unsolved problem in the prior art of filtering solid debris from liquid samples containing nucleic acid. In preferred configurations, the filter elements are capable of quickly filtering even  
20 large volume samples. In comparison to conventional cellulose or glass fibre paper type filters, the filter elements of the invention typically retain less of the liquid sample in the filter, an important advantage in this context as nucleic acid containing liquid sample are  
25 often low volume.

The present invention can further be readily adapted for automatic processing in an 8 x 12 format and a standardised pitch where an increased diameter will  
30 prevent or hinder multi-channel filtration. The geometry of the filter elements of the invention, which are generally longer than they are wide, works well in these situations, especially when assisted by suction. In this case, typically the length of the filter elements is  
35 greater than the width and more preferably at least 1.5

times the width, and still more preferably 2 times the width. The width of the filter element is measured parallel to the plane of the end wall, with the length of the filter element measured parallel to the plane of the side wall(s).

A preferred material for making the filter elements is a porous plastic material such as polypropylene, high density polyethylene (HDPE), polytetrafluoroethane (PTFE), nylon or polyether sulphone. These materials are readily available as sintered plastics and can be formed into the rigid filter elements having the shapes described above. Alternatively, sintered glass could be employed, or an alternative silica, glass or ceramic material.

Preferably, the filter element has a pore size between about 0.01 microns and about 500 microns, more preferably between about 10 microns and about 200 microns, and more preferably between about 20 and about 50 microns. For the filtration of nucleic acid samples, the present inventors have found a pore size between about 10 and about 30 microns to be optimal.

In a further aspect, the present invention provides an apparatus comprising a filter element as described herein.

In a further aspect, the present invention provides a kit comprising a plurality of the filter elements and optionally apparatus into which the filter elements are adapted to fit.

In a further aspect, the present invention provides the use of a filter element as described herein for filtering

solid contaminants from a liquid sample containing nucleic acid.

5 In a further aspect, the present invention provides a method of filtering a liquid sample comprising nucleic acid and one or more solid contaminants, the method comprising passing the sample through a filter element as described herein so that the liquid containing the nucleic acid passes through the filter element and the  
10 solid contaminants are retained by the filter element.

In a preferred embodiment, the method includes the initial step of lysing a cell culture to provide a sample and precipitating proteins present in the sample, e.g.  
15 with sodium doceyl sulphate (SDS). This commonly used method to prepare samples results in a large amount of solid material that cannot be filtered efficiently using prior art techniques.

20 According to the invention there is provided a filter element which comprises a sintered material adapted to be moulded to produce a rigid porous structure and the invention also provides a filter which incorporates such a filter element.

25 Preferably the filter element provides a large surface area, e.g. it is in the form of a hollow plug with the length longer than the width for example with the ratio of length to width of at least 1.5:1, and more preferably  
30 at least 2.0:1.0.

An example of a separation device that incorporates the element of the invention uses the element in a multi-channel array, e.g. an 8 x 12 array.

35

Preferably the device is comprised of a rigid, mouldable, self-supporting porous plug, composed of sintered porous plastic or glass, that can be attached to a pumping or sucking system. The porous plug may be modified  
5 chemically or by adsorption of ligands to specifically capture target compounds or remove unwanted materials.

The device may be any shape with a cross sectional area to maximise surface area. Preferably, the devices are  
10 longer than they are wide to maximise surface area but maintaining a low diameter for insertion into tubes. The rigid wicks or hollow plugs may be nested inside each other to create a sequence of filters or the hollow plug may contain further particles or microfibers to filter  
15 out fine material. Alternatively, a large number of smaller plugs may be used in parallel to provide even larger surface areas.

The device may be combined with chromatographic or  
20 affinity purification using standard solid-phases, e.g. ion-exchange, Protein A, antibodies, Streptavidin, etc.

The device is particularly useful for the filtration or purification of biomolecules and cells and especially for  
25 separating nucleic acids from liquid mixtures.

In use the liquid to be purified, or from which solid material is to be separated, is drawn up through the filter element into a reservoir or other receptacle.  
30

The invention is particularly useful to remove cell debris from lysed cells.

One embodiment of the invention allows a crude extract of  
35 insoluble or soluble materials to be sucked up into a



reservoir from a range of laboratory test tubes such as PCR tubes, micro-titre plates, centrifuge tubes and any standard container from a few microlitres to litre volumes. Once the fluids have been drawn up through the device then further processing or purification is possible.

The shape and design of the device is flexible and may be formed by moulding the porous material into any shape or structure.

It is a feature of the device that it can maximise flow rates, prevent clogging or blockages and presents a larger than normal surface area parallel to the fluid in both directions while maintaining a narrow diameter for multi-channel fluid handling systems.

The filter element is self supporting and rigid, not requiring other supporting casing or moulds for it to work. Therefore it can be placed over the outside of a dispensing or aspirating system and removed to discard the filter element or to process the material captured by the filter element.

The filter element can be incorporated internally in a pipette or can be attached to the end of a pipette so that liquid can be sucked up through the filter element into the pipette.

Several designs of plug have been tested for efficient separation of contaminants, using cellulose or glass microfiber membranes. Another variation for microbial purifications is that the cells or debris can be concentrated or removed by using specific ligands such as

antibodies, polymixins, lectins, enzymes, boronic acid or other affinity materials.

The device is especially suitable for biological samples from medical research to food and agriculture where insoluble materials need to be removed before purification of the target analyte.

Embodiments of the present invention will now be described in more detail by way of example and not limitation with reference to the accompanying drawings.

#### **Brief Description of the Drawings**

Figures 1 and 2 shows embodiments of the invention and in place in different apparatus where a filtration function is needed.

Figures 3a and 3b show an example of a closed tubular embodiment of the invention.

Figure 4 shows an example of a filter element with a protruding side wall, in place in a centrifuge tube.

Figure 5 shows a perspective view of the filter element of Figure 4.

Figure 6 shows the filter element of Figure 4 or Figure 5 in place in a pipette tip.

#### **Detailed Description**

Figure 1a shows a syringe 1 sucking up a plasmid preparation 3 through a hollow porous plastic plug 2 with the bottom end 4 closed. The debris remain on the outside of the plug allowing the DNA to travel through into the syringe barrel. The plug 2 avoids immediate

blockage by presenting a large surface area and the external housing of the cartridge allows the material to travel up the plug without forcing the particulate material into the pores. The plug 2 only blocks when the liquid has travelled all the way to the top of the housing. The filtration device may then be removed and the liquid transferred into a new tube. The use of this embodiment is described in Examples 1, 2 and 3.

10 The above system allows fully automated extraction of plasmid DNA from crude bacterial lysates. The reservoir above the filter holds the clarified fluid for purification on affinity media of some type.

15 The device has many applications whether in a manual or automated operation and even with larger volumes a standard eight by twelve array of tubes can be processed without a pitch change in a multi-channel instrument.

20 Figure 1b shows a plug 2 in a pipette tip 5 so that, if the plasmid lysate is clarified, then the plug may be modified to capture DNA directly.

Figure 1c shows a modification of the Figure 1a device without the external housing surrounding the hollow plug 2.

Figure 1d shows a porous plug or hollow plug 2 fitted on externally to allow easy removal while maintaining the fluid in the pipette tip 5.

Figure 1e shows a porous plug fitted onto a solid pin or moulding that can be dipped into a tube to capture biomolecules. This could be extended to an 8 x 12 microtitre format or PCR tube array.

Figure 1f shows embodiments of the plugs 2 of the invention which are shaped to increase the surface area in standard pipette tips, with end walls 7 and side walls 5 6 marked.

Figure 1g shows the outline of a hollow porous plug made from sintered plastic or glass, showing the side walls 6 and end wall 7 of the plug 2. The device is rigid enough 10 to support itself and the open end is fitted onto the sucking and pumping system. This design maximises surface area vertically and reduces the pitch between adjacent devices, e.g. in a multi-channel system.

15 In Figure 2a there is a pump 5 that can generate continuous liquid flow through the device incorporating plug 6 so that the liquid may be re-circulated if required.

20 Figure 2b shows how the device may be used with centrifugation tubes to increase the surface area compared to a flat disc where 7 is the liquid and 8 is the filter element.

25 Figure 3 shows an embodiment of the invention which uses a filter element 8 having the form of a tubular plug 10 having a closed end 12 and an open end 14, with arrows showing the flow of a liquid sample through the filter element. The external surface of the closed end 12 30 provides an end wall 18 and the curved surface of the tubular part of the plug defines a side wall 20. The filter element 8 is retained in a syringe, pipette or other tube 16 with the closed end 12 of the plug directed towards the flow of the sample into the tube 16. When a 35 sample encounters the filter element 8, solid

contaminants, such as cell debris, will tend to be retained on the end wall 18, while liquid containing nucleic acid and other soluble components of the sample can pass through the side wall 20 into the hollow core of the tube and out of the open end 14 for further purification or analysis, the hollow core helping the efficiency of filtration by reducing the transmembrane pressure experienced by the sample across the filter element. The tendency of the end wall of the device to capture debris and the high surface area that results from using a porous plastic material to form the filter element 8 means that the rapid clogging observed with prior art filtration techniques is avoided, and that instead layers of solid debris tend to build up on the end wall of the device.

Figure 4 shows an alternative form of filter element 8, in this case designed to fit across the opening of a centrifuge or PCR tube 22. The filter element has an end wall 18 which spans the opening 24 of the tube 22 and a generally cylindrical central portion 26 having a side wall 20 which protrudes towards the direction of sample flow. In use, a sample introduced into the open space at the top of the tube 22 can filter through the end wall 18 and side wall 20, with debris again tending over time to collect against the end wall, leaving the liquid free to filter through the side wall 20 as the protruding central portion stands clear of the build up the solid debris. Figure 5 shows a perspective view of the filter element 8, while Figure 6 shows the filter element in place in a pipette tip 28. As in Figure 3, the arrows indicate the direction of liquid flow through the filter element.

#### Example 1

**Extraction of nucleic acid from bacterial lysates**

This example demonstrates the filtration of bacterial lysates and the purification of plasmid DNA. An overnight culture of *E. Coli* possessing a plasmid was lysed using a modified alkaline lysis method and the cell debris were removed by sucking the fluid up through a rigid 20 micron porous sintered plastic plug using embodiment shown in Figure 1a. The debris was retained by the filter allowing the plasmid DNA to travel into the reservoir in this case a syringe barrel or pipette tip. The plasmid DNA was captured on the modified plug and washed free of contaminants with water before recovery in a small volume of Tris.HCl pH8.5. The plug was removed and the fluid allowed to be pumped down through another plug covalently modified with polyhistidine according to patent application WO 99/29703 (DNA Research Instruments Ltd).

### **Example 2**

#### **Extraction of nucleic acid from natural source material**

2 grams of cabbage leaves were homogenised in warm sodium dodecyl sulphate (SDS) to release the nucleic acids. Following potassium acetate/potassium chloride precipitation, the fluid was sucked up a twenty micron plug to remove the insoluble material and the DNA extracted using a polyhistidine affinity membrane combined in the device.

### **Example 3**

#### **Extraction of nucleic acid from white blood cells.**

Affinity capture of analytes such as nucleic acids, proteins, cells, organelles and other compounds were performed using this device. The capture or removal of white blood cells from whole anti-coagulated blood can be performed by mixing the blood with ammonium bicarbonate buffers containing high levels of non ionic detergents such as 1% (v/v) Tween 20.

The blood is sucked through a hollow plug allowing the cells to bind and the contaminants washed off using the same buffer. The cells may then be processed for collection of DNA, RNA or analysed by a known method. This system can be used in combination with collection of blood samples directly from the donor either using a needle and syringe or a vacuum tube to suck the blood through the porous material. The porous material may be used to store the captured substance or transferred to another storage tube without having to release the captured substance.

20

#### Example 4

##### **Extraction of plasmid DNA from culture**

An overnight culture of E.Coli/PUC19 was prepared and 25ml centrifuged to pellet the cells. The cell pellet was resuspended in 2ml of 10mM Tris HCl containing Rnase A and mixed with a further 2ml of 0.2M NaOH with 1%SDS to lyse the cells and release the plasmid DNA. The cellular debris and SDS was then precipitated with 2ml of 3M potassium Acetate pH4 and left to stand for 5 minutes. The liquid was separated from the precipitate by a filter element of the type depicted in Figure 3, using a 25 micron pore plastic hollow plug inside a 3ml cartridge about 4cm long and 1cm in diameter. The cartridge tip was dipped into the mixture and the liquid sucked up through the filter into a syringe barrel. The

35

precipitate remained on the outside of the porous plug producing a clear liquid in the syringe barrel in about 1 minute. The total yield of liquid was 5.5ml, over 90% recovery from the starting material. The filtered liquid  
5 was then processed to obtain pure plasmid using magnetic beads derivatised with Bis-Tris or by alcohol precipitation.

The filter plug was then regenerated by pumping water  
10 back through until all the precipitated was washed away. This can then be used for repeat experiments or continuous flow operation.

The same experiment was repeated except the cartridge was  
15 inverted and the precipitated mixture was pumped from the syringe barrel down through the plug. The precipitate collected at the base of the plug leaving the majority of the filter unclogged to allow easy flow of liquid. In this case, recovery of liquid was even better at about  
20 95% yield.

The device was used as a pre-filter on the same volume of plasmid preparation to allow filtering down to 1 micron or 0.45 micron. By incorporating an additional filter  
25 after the plug, the device allowed filtration to 1 micron or less with 80% recovery of fluid and a 5 minute filtration time.

#### Example 5

#### 30 **Comparison with conventional filtration**

Instead of using the filter element described above, a standard 25 micron pore frit made of porous plastic sheet with a diameter of 25mm was inserted into a 30ml syringe barrel with spacing collars to hold it in place and  
35 expose the surface to the liquid.



The precipitated mixture from the plasmid preparation was either sucked up through the frit or pushed through. In both cases, only 50% of the fluid was recovered due to almost immediate clogging of the membrane. In an attempt to prevent clogging, stacks of filter paper were placed in front of the 25mm frit, but the performance in terms of yield of liquid and flow rates could not be improved.

Thus, if standard 25mm glass fibre or paper pre-filters are used, clogging occurs very quickly and recovery of liquid is slow. In many cases, this means that it is impractical to use filtration to remove solid contaminants from liquid samples containing nucleic acid.

15

#### **Filtration in microtubes using centrifugation vacuum manifolds**

A conventional frit or filter from a 1.5ml centrifuge filter tube was replaced with a porous 25 micron plug inverted to increase the surface area and prevent clogging. A 5ml culture was precipitated as described above reducing the original volume to about 1ml ready for filtration. The mixture was tipped into the tube with the plug and either placed on a vacuum manifold or centrifuged for 3 minutes. The fluid was easily collected with no signs of clogging and 90% of liquid was recovered.

With the original filter material in place, clogging with this sample volume occurred immediately and only about 50% of the original was recovered.

#### **Filtration using pipette tips**

A standard 1ml pipette tip was used to filter a 5ml plasmid preparation by inserting a 25 micron plug into the tip. The mixture could either be sucked up or pumped through within 1 minute with 80% recovery of liquid.

- 5 This was then repeated using a multi-channel pipettor for filtering 8 samples simultaneously.

**Claims:**

1. A filter element formed from a material having a rigid porous structure with a pore size between about 10 and about 200 microns, the filter element having an end wall and one or more side walls extending out of the plane of the end wall, so that when a liquid sample comprising nucleic acid and solid contaminants is introduced into the element, the liquid containing the nucleic acid filters through the side and/or end walls, while the solid contaminants are retained.
2. The filter element of claim 1, wherein the filter element is a close ended tube with the side wall defined by a curved wall of the tube and end wall defined by the outside of closed end of the tube.
3. The filter element of claim 1, wherein the filter element is in the form of a plug for spanning an aperture in a piece of apparatus, and having an end wall from which a side wall protrudes.
4. The filter element of any one of claims 1 to 3 which is adapted to fit into a pipette tip, a syringe or a PCR or centrifuge tube.
5. The filter element of any one of the preceding claims, wherein the material is a plastic.
6. The filter element of any one of the preceding claims wherein the plastic is polypropylene, high density polyethylene (HDPE), polytetrafluoroethane (PTFE), nylon or polyether sulphone.
7. The filter element of claim 5 or claim 6, wherein the plastic is a sintered plastic.

8. The filter element of any one of the preceding claims, wherein the pore size is between about 20 and about 50 microns.

5

9. The filter element of any one of the preceding claims, wherein the length of filter element is greater than its width.

10 10. The filter element of claim 9, wherein the ratio of length to width is at least 1.5:1.

11. Apparatus comprising a filter element of any one of the preceding claims.

15

12. The apparatus of claim 11 which is a pipette tip, a multipipettor, a syringe, or a PCR or centrifugation tube.

20 13. A kit comprising a plurality of the filter elements of any one of claims 1 to 10 and optionally apparatus into which the filter elements are adapted to fit.

25 14. Use of a filter element of any one of claims 1 to 10 for filtering solid contaminants from a liquid sample containing nucleic acid.

30 15. A method of filtering a liquid sample comprising nucleic acid and one or more solid contaminants, the method comprising passing the sample through a filter element of any one of claims 1 to 10 so that the liquid containing the nucleic acid passes through the filter element and the solid contaminants are retained by the filter element.

35

16. The method of claim 15, wherein the liquid sample is a cell culture and the method includes the initial step of lysing a cell culture and precipitating proteins present in the sample.

5

17. The method of claim 15 or claim 16, comprising the step of sucking the liquid sample through the filter element.

10

Fig.1a.

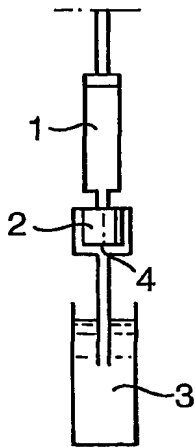


Fig.1b.




Fig.1c.

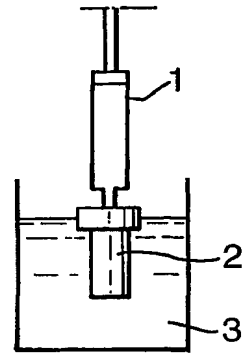


Fig.1d.




Fig.1e.




Fig.1f.


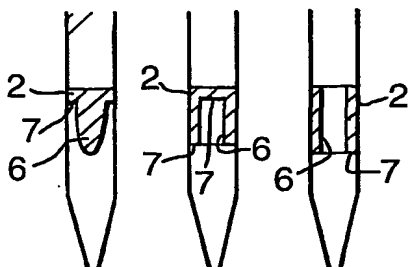


Fig.1g.



2/3

Fig.2a.




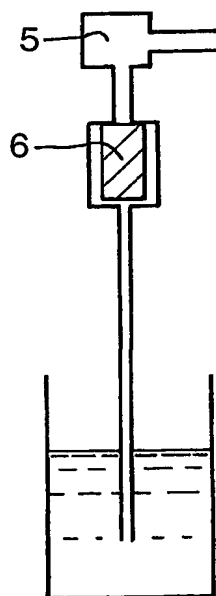




Fig.2b.

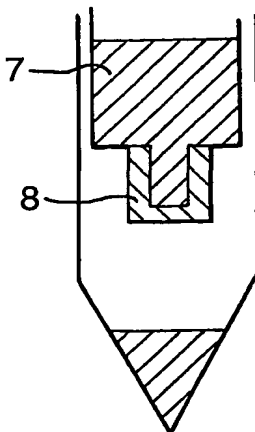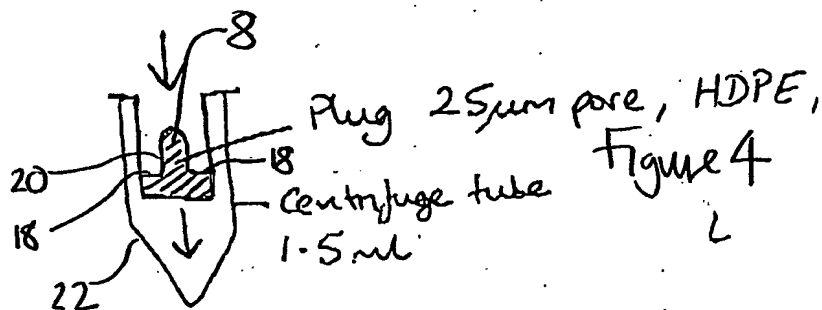

3/3

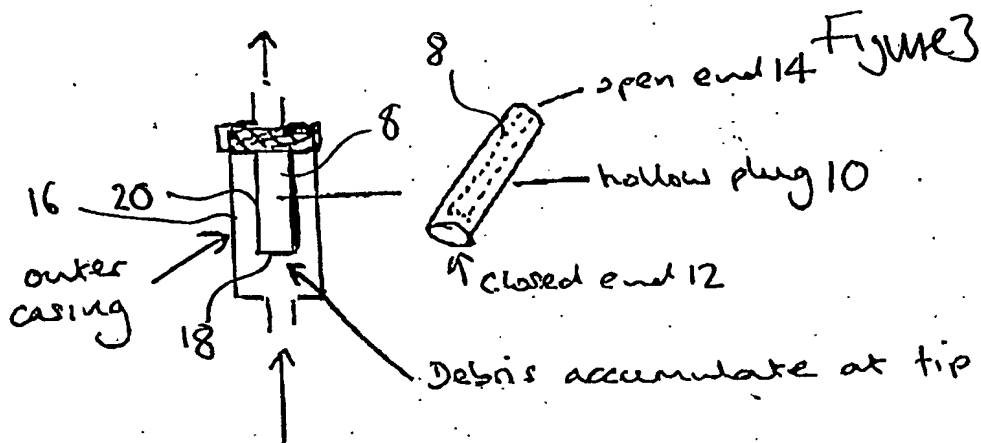

6-10mm diameter 1, 4-5mm diameter 2,  
Length 12-15mm.

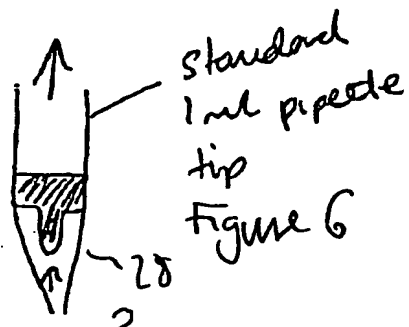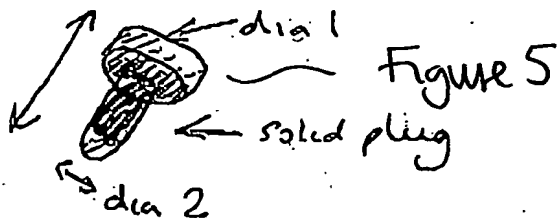



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
22 November 2001 (22.11.2001)

PCT

(10) International Publication Number  
**WO 01/88185 A3**

(51) International Patent Classification?: **C12Q 1/68**,  
C12N 15/10, B01D 39/02

(21) International Application Number: PCT/GB01/02122

(22) International Filing Date: 14 May 2001 (14.05.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0011443.9 13 May 2000 (13.05.2000) GB

(71) Applicant (for all designated States except US): **DNA RESEARCH INNOVATIONS LIMITED** [GB/GB];  
940 Cornforth Drive, Sittingbourne Research Centre,  
Sittingbourne, Kent ME9 8PX (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BAKER, Matthew, John** [GB/GB]; 481 Loose Road, Maidstone, Kent ME15 9UJ (GB).

(74) Agents: **KIDDLE, Simon, J. et al.**; Mewburn Ellis, York House, 23 Kingsway, London, Greater London WC2B 6HP (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(88) Date of publication of the international search report:  
4 April 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



**WO 01/88185 A3**

(54) Title: A FILTER ELEMENT FOR USE IN SEPARATION OF BIOMATERIALS FROM SOLID CONTAMINANTS

(57) Abstract: A filter element for use in separation or purification of biomaterials such as nucleic acids from solid contaminants such as cell debris is described, having an end wall against which debris can collect and a side wall through which filtration can occur, in the presence of debris layered against the end wall. The filter elements are preferably formed from a porous, rigid plastic and are adapted to fit in a syringe, pipette or tube.

# INTERNATIONAL SEARCH REPORT

International Application No  
PC1/GB 01/02122

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C12Q1/68 C12N15/10 B01D39/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C12Q C12N B01D C12M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, EPO-Internal, BIOSIS, MEDLINE, CHEM ABS Data, EMBASE, BIOTECHNOLOGY ABS, SCISEARCH

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 26540 A (KEMPE TOMAS ;BARRSKOGEN INC (US)) 24 July 1997 (1997-07-24) page 8, line 16 -page 11, line 27 page 12, line 1 -page 14, line 24; claims 1-14; figure 1 page 14, line 22 - line 24 page 16, line 8 - line 21 page 13, line 19 - line 24 page 16, line 9 -page 17, line 2 abstract	1-17
X	WO 00 09680 A (CHIRON CORP) 24 February 2000 (2000-02-24) page 2, paragraph 6 page 6, paragraph 4; figure 1 page 7, paragraph 2; claims 1-14 page 4, paragraph 4 -page 7, paragraph 1 -/--	1-17

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

6 December 2001

Date of mailing of the international search report

18/12/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Tilkorn, A-C

# INTERNATIONAL SEARCH REPORT

International Application No  
PC/GB 01/02122

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 96 41810 A (DON ROBERT HUGH ;EVANS TIMOTHY MARTIN (AU); PROGEN IND LIMITED (AU) 27 December 1996 (1996-12-27) page 2, line 21 -page 5, line 31; claims 1-62; figure 1 ----	1-17
X	WO 00 25922 A (THE PERKIN-ELMER CORPORATION) 11 May 2000 (2000-05-11) abstract page 23, line 28 -page 24, line 16; figures 3-6 ----	1-17
X	US 5 824 224 A (FUJISHIRO MASATOSHI ET AL) 20 October 1998 (1998-10-20) abstract column 7, line 2 -column 17; claims 1-3 ----	1-17
X	WO 96 08500 A (QIAGEN GMBH ;COLPAN METIN (DE)) 21 March 1996 (1996-03-21) abstract; claims 1-14; figure 1 -----	1-17

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 01/02122

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9726540	A	24-07-1997	US 5648271 A US 5897838 A WO 9726540 A1	15-07-1997 27-04-1999 24-07-1997
WO 0009680	A	24-02-2000	US 6268492 B1 EP 1104458 A1 WO 0009680 A1	31-07-2001 06-06-2001 24-02-2000
WO 9641810	A	27-12-1996	AU 693701 B2 AU 5888096 A WO 9641810 A1 CA 2223896 A1 EP 0830364 A1 JP 11507544 T US 5989431 A	02-07-1998 09-01-1997 27-12-1996 27-12-1996 25-03-1998 06-07-1999 23-11-1999
WO 0025922	A	11-05-2000	US 6159368 A AU 1518400 A EP 1124637 A2 WO 0025922 A2	12-12-2000 22-05-2000 22-08-2001 11-05-2000
US 5824224	A	20-10-1998	JP 2832586 B2 JP 9047278 A US 5645723 A	09-12-1998 18-02-1997 08-07-1997
WO 9608500	A	21-03-1996	DE 4432654 A1 AT 181921 T AT 179425 T AT 187733 T AU 684134 B2 AU 1577695 A AU 693511 B2 AU 1577795 A AU 691574 B2 AU 1664695 A AU 1664795 A CA 2182388 A1 CA 2182397 A1 CA 2182398 A1 DE 59505786 D1 DE 59506355 D1 DE 59507433 D1 DK 743948 T3 DK 775150 T3 DK 743949 T3 WO 9521177 A1 WO 9521178 A1 WO 9521179 A1 WO 9608500 A1 EP 0743948 A1 EP 0775150 A1 EP 0743949 A1 EP 0781291 A1 JP 9508406 T JP 9508283 T JP 9508407 T US 6297371 B1 US 5747663 A	21-03-1996 15-07-1999 15-05-1999 15-01-2000 04-12-1997 21-08-1995 02-07-1998 21-08-1995 21-05-1998 21-08-1995 29-03-1996 10-08-1995 10-08-1995 10-08-1995 02-06-1999 12-08-1999 20-01-2000 31-01-2000 08-11-1999 10-04-2000 10-08-1995 10-08-1995 10-08-1995 21-03-1996 27-11-1996 28-05-1997 27-11-1996 02-07-1997 26-08-1997 26-08-1997 02-10-2001 05-05-1998

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 01/02122

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
W0 9608500	A	US 5792651 A	11-08-1998
		US 6274371 B1	14-08-2001
<hr/>			